

The B-Line[®]



Advantage


C.T. Mounting Base



Features

- Line side studs & load side lugs.
- Single or multiple cables per phase.
- 50,000 A.I.C. rating.
- Listed by Underwriters Laboratories.
- Approved by "EUSERC"*

* Check with your local utility

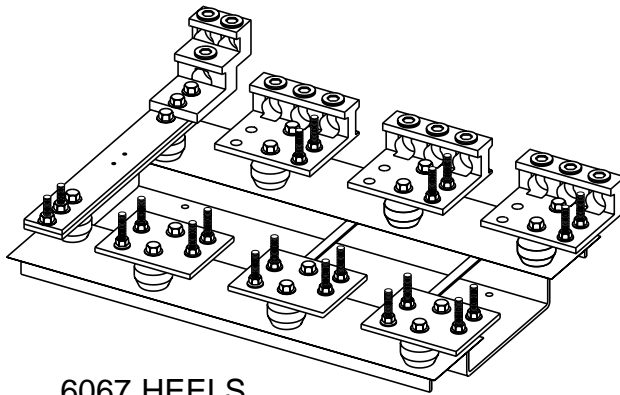

6067 HEELS



Stud terminals are provided on line side for utility wires - lugs provided on load side of this C.T. mounting base series - suitable for single cable or multiple cable for the device's rating (in accordance with N.E.C./NFPA-70).

Catalog Number	A.I.C. Rating	AMPS	Volts	Service	Lug Wire Range
6019HALS	50,000	400	600	1Ø, 3W	(1) #4 AWG - 600 kcmil or (2) #1 - 250 kcmil
6019HELS	50,000	800	600	1Ø, 3W	(3) #4 AWG - 600 kcmil or (6) #1 - 250 kcmil
6067HALS	50,000	400	600	3Ø, 4W	(1) #4 AWG - 600 kcmil or (2) #1 - 250 kcmil
6067HEELS	50,000	800	600	3Ø, 4W	(3) #4 AWG - 600 kcmil or (6) #1 - 250 kcmil