

The B-Line[®]




Advantage

Multiple Residential Meter Sockets With By-Pass




Features

- For Horizontal Multi-Meter Installations.
- Two Through Six Meter Positions.
- Meets Utility Requirements.
- Listed by Underwriters Laboratories.
- 400 AMP/600 V.A.C. Main Rating.
- Overhead or Underground Use.
- H-Style Hub Provision
- Surface Mounting

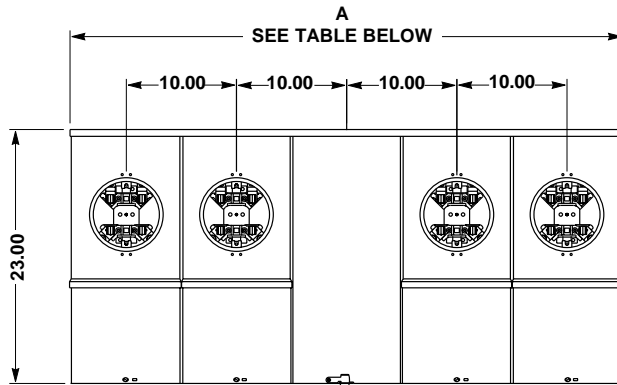

FRONT VIEW
(244MCC)

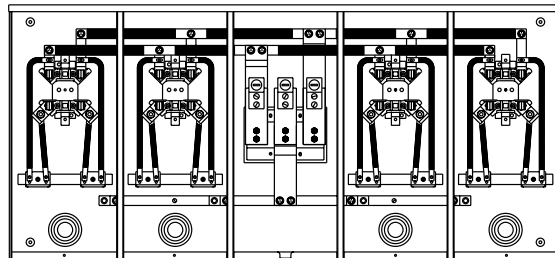

FRONT VIEW
(W/OUT COVERS)



Catalog No.	Meter Position	Main Bus Ampacity	Socket Ampacity Continuous	Volt.	Service Type	Number of Jaws	Hub. Prov.	Phase & Neutral Conductors		A (inches)
								Line	Load	
242MCC	2	400	200	600	1 Phase 3W	4	H	(1) #4AWG-600 kcmil or (2) #1-250 kcmil	6AWG-250 kcmil	30
243MCC	3	400	200	600	1 Phase 3W	4	H	(1) #4AWG-600 kcmil or (2) #1-250 kcmil	6AWG-250 kcmil	40
244MCC	4	400	200	600	1 Phase 3W	4	H	(1) #4AWG-600 kcmil or (2) #1-250 kcmil	6AWG-250 kcmil	50
245MCC	5	400	200	600	1 Phase 3W	4	H	(1) #4AWG-600 kcmil or (2) #1-250 kcmil	6AWG-250 kcmil	60
246MCC	6	400	200	600	1 Phase 3W	4	H	(1) #4AWG-600 kcmil or (2) #1-250 kcmil	6AWG-250 kcmil	70